

POPE			
POWERTRAIN			
Engine Type	TATA 4SP CR Turbo Intercooled (BS-IV)- Water cooled Common Rail		
Displacement/ Cubic capacity	2956cc		
Maximum Power Output(in kW)	62.5 kW (85 PS)@2800 r/min		
Maximum Torque (in Nm)	250 Nm@1400 -2400 r/min		
Bore x Stroke (in mm)	97mm X 100mm		
Clutch	Single plate dry friction type- 280 mm dia.		
Transmission	G-380 Synchromesh 5Forward & 1 Reverse		
FUEL SYSTEM			
Fuel Injection system	Electronic Delphi		
Fuel tank capacity (in litres)	60L		
ELECTRICALS			
Battery	12V, 70 Ah		
Alternator	75 Amps		
PERFORMANCE			
Gradeability	23%		
Max speed in Top gear	105km/h		
STEERING			
Steering System	Manual Steering-Recirculating ball type with rack and sector		
FRAME			
Frame	Ladder type frame with riveted/bolted cross members.		
BRAKES			
Service Brake	Vacuum assisted dual circuit hydraulic with tandem master cylinder		
Parking Brake	Cable operated Mechanical / Spring brake acting on all rear wheels		
SUSPENSION & TYRES			
Front Suspension	Semi elliptical leaf spring and Hydraulic double acting telescopic type Shock Absorber with Antiroll Bar		
Rear Suspension	Semi elliptical leaf spring and Hydraulic double acting telescopic type Shock Absorber		
No of tyres	Front 2,Rear 2 , Spare 1		
Front	8.25 x 16 -16PR Diagonal Ply Rib		
Rear	8.25 x 16 -16PR Diagonal Ply Lug		
WEIGHT	CAB	CLB	HD
Front Axle Weight -FAW (in kg)	2350	2350	2350
Rear Axle Weight -RAW (in kg)	3650	3650	3650
Rated Payload (in kg)	3876	3560	3424
Gross vehicle weight (in kg)	5950	5950	5950
OVERALL DIMENSIONS			
Wheel base (in mm)	3100	3100	3100
Overall Length (in mm)	4955	5050	5050
Overall Height (in mm)	2330	2330	2850
Overall Width (in mm)	1906	1980	2046
LOAD BODY DIMENSIONS			
Load body Length (in mm)	NA	2883	2977
Load body Width (in mm)	NA	1908	1922
Load body Side deck Height (in mm)	NA	444	1209
Loading Platform Height (in mm)			
Minimum Turning Dia (in mm)	12000 (12 mt)	12000 (12 mt)	12000 (12 mt)
Minimum Ground Clearance (in mm)	223	223	223
Warranty	3 years or 3 Lakh Km, whichever is earlier*		
	* Conditions apply		

* Conditions apply

EX

has become synonymous with high performance and superior quality.

- ExTRA REVENUE
- ExTRA SAVINGS
- ExTRA PROFITS
- ExTRA COMFORT
- ExTRA SAFETY



CAUTION:

- Do not weld or drill on chassis frame.
- Accessories shown in the picture or elsewhere do not constitute standard fitments.
- The specifications are indicative. Due to continuous product improvements, these specifications are liable to change without notice.

For more information, please visit our website: www.tatamotors.com/light-trucks. tatamotors.com, you can also contact our Sales Office: Tata Motors Limited, 20th Floor, Tower 2, One Indiabulls Centre, 841, Senapati Bapat Marg, Mumbai 400 013. Tel: 91 22 6658 6000; Fax: 91 22 6658 60101.

Dealer Stamp

TATA MOTORS

All-Season High Performance Vehicle



SFC 407 BSIV



DRIVER'S SAFETY



FUEL EFFICIENT ENGINE



HIGHER PAYLOAD



3 YEARS / 3 LAKHS KMS WARRANTY



3 DECADES OF RELIABILITY & TRUST

INDIA's ICONIC LCVs

The right choice for the Indian market

SFC 407

SFC 407 is ideally suitable for all sorts of loads and applications for any season and geography. India's first LCV, it was introduced in 1986 and is still the highest selling LCV in the country. With its trademark SFC face and reliable aggregates, you are assured of a safe and comfortable ride every time.

SFC: ADVANTAGE

SAFE & COMFORTABLE : We understand that driving commercial vehicles is a serious business. For special applications where, often speed is for the essence, the customer needs to know that he will be safe at all times. The unique 'nose' of the SFC 407 gives confidence, safety and security to the person behind the wheels.

Tata Motors is the only manufacturer in the country actively selling SFC face vehicles in the Light Commercial Vehicle segment. At Tata Motors we believe that safely is our number one priority.

FEATURES

- Recling and sliding driver seats
- Door Handle cum Arm rest
- Bottle Holder
- Seating Capacity- Driver +2
- Seat Material-Vinyl Fabric
- Engine Compartment Light
- Seat Belt warning light for driver
- Moulded Roof Lining
- ELR seatbelt
- Glove Box
- Roll Down window
- Adjustable head Rest
- Utility Box under Drivers seat
- GAP seat provision for better comfort in longer drives
- Strongest & Reinforced Ladder type chassis frame
- Low loading platform height of 995 mm for ease in loading and unloading
- Largest loading area of 5.5 Sq. mt. - best in its class
- Battery charge indication lamp
- Speed Limiting on ECU
- Stylish Front grill with Chrome




LARGER LOADING AREA



LOWER TCD



BEST-IN-CLASS GRADEABILITY

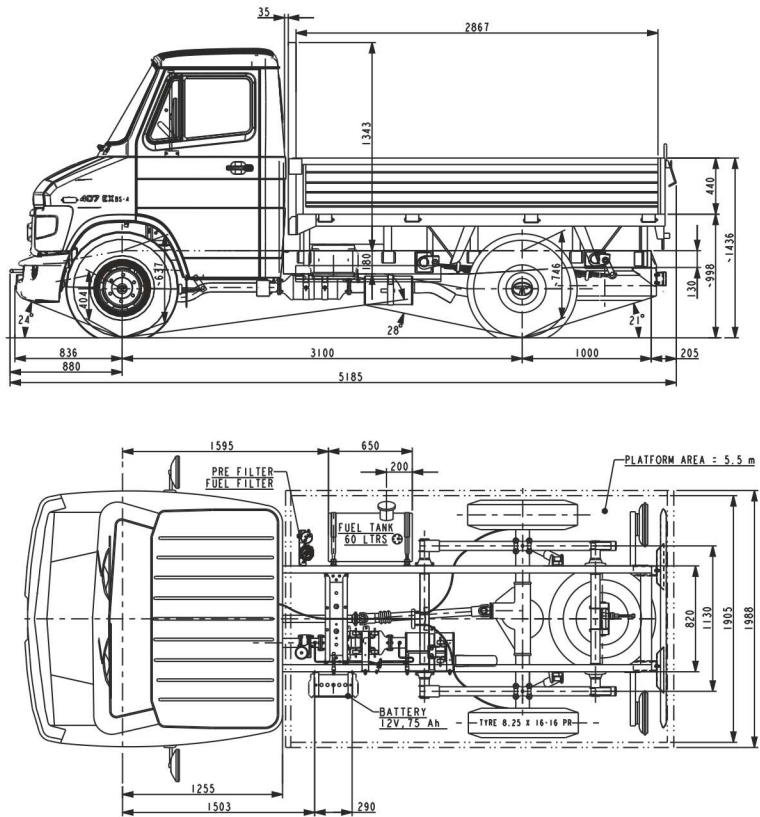

MOST FUEL EFFICIENT ENGINE

TATA 4SP CR TURBO INTERCOOLED

Reliable 4SP CR TURBO- Water cooled Common Rail Technology

Optimized Power and Torque for Best In Class Mileage

Largest Clutch Plate (280 mm) in Segment

BS-IV Compliant



Tried, Tested & Trusted



Reliable 4SP CR Engine



Most Cost Efficient in its Class



High Horsepower and Torque



Highest Resale Value



Heavy Duty Aggregates



Largest Customer Base



Lowest Spare Parts Cost

All Seasons
Many applications



Vegetables



Dairy



LPG



Beverages



Grain